




# AC-SM1001p-C

Install Instructions For:  
SM1001p Powered Subwoofer Corner Mount Bracket

For wiring instructions, consult SM1001p installation instructions.  
Alternate optional accessory is a surface mount bracket (AC-SM1001p-S).

Security screw —

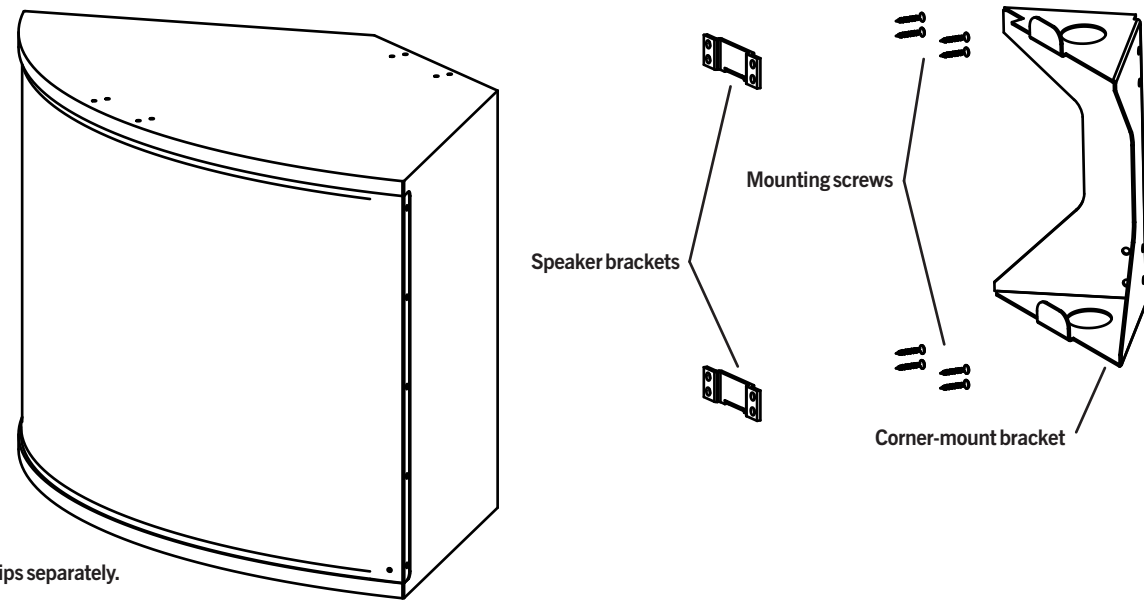

Note: Speaker ships separately.

**Box contents: Corner-mount kit**

- 1 Corner-mount bracket
- 2 Speaker brackets
- 8 Fasteners (1/2 inch wood screws)
- 1 Security screw

© 2010 SoundTube Entertainment, Inc. All rights reserved. PN SM1001p-C Rev07.13.10



**Warning**

SoundTube speakers must be installed by a professional audio installer/contractor. For safety and for optimum audio performance, installer must follow all directions issued by SoundTube Entertainment.




**Warning**

Do not spec or install speaker near support beam, ventilation duct or other structure that may interfere with speaker function or dispersion.


# AC-SM1001p-C

Corner-mount Installation For:  
SM1001p Powered Subwoofer


1.435.647.9555 | 800.647.TUBE | www.soundtube.com




1. Unpack subwoofer and unscrew 4 feet. Remove screws from rubber plugs and replace screws to fill holes.




2. Choose a secure corner and mount bracket with tabs pointing up. Corner mount bracket must be mounted at least 3 inches below ceiling, beam or other top structure. Bracket accepts up to 1/4 inch lag bolts (installer supplies fasteners). **Be sure mounting tabs point up.**




3. Mount speaker brackets to back of speaker with tabs pointing down. Use included 1/2 inch wood screws.

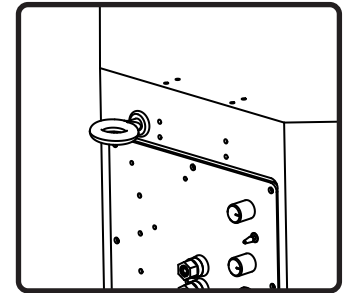


4. For a safety cable attachment, screw the forged eyebolt into the 1/4-20 insert on the back of the speaker and attach included safety cable from forged eyebolt to a secure mounting point on the structure. Installer to supply fasteners to structure.




5. Run wires through hole in top or bottom of bracket. Connect wires and set gain and filters as described in the SM1001p installation instructions.



6. Slide speaker onto pre-mounted bracket.



7. Install security screw.

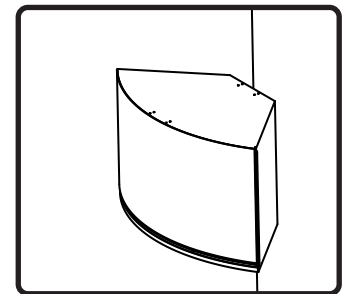

8. Done!